
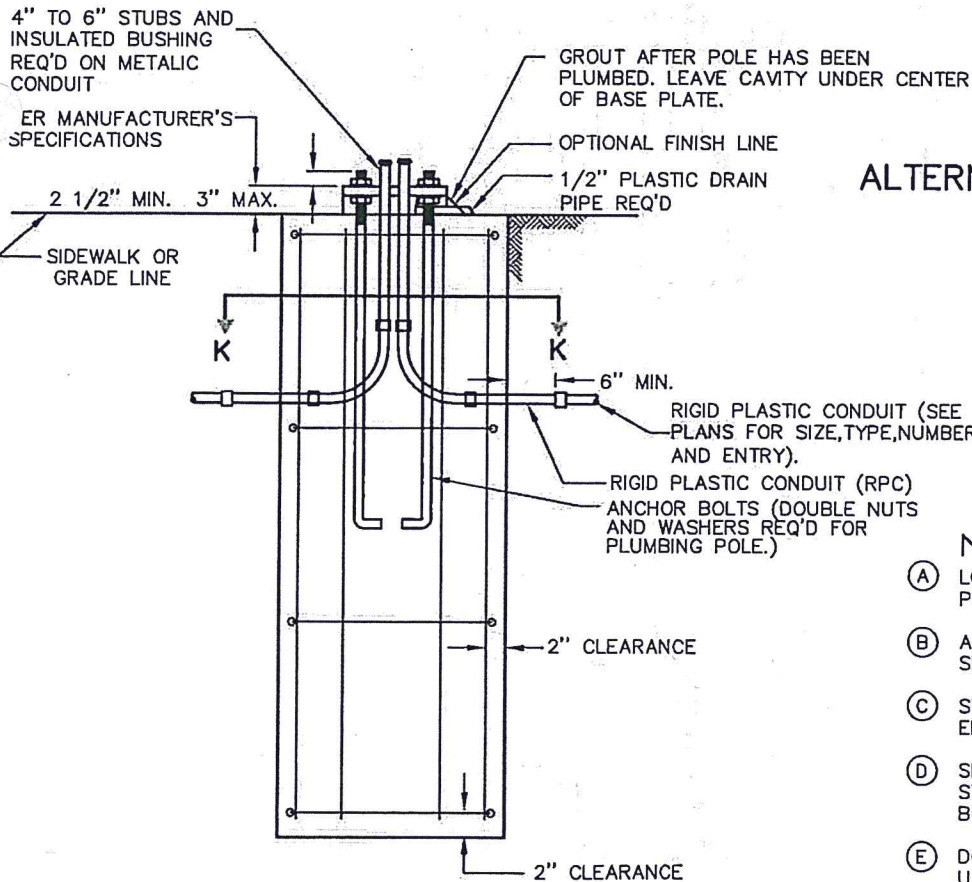
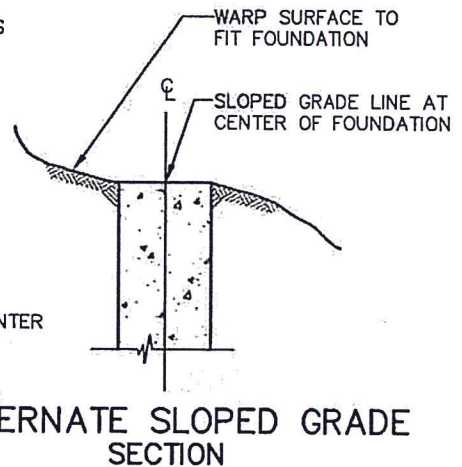


POLE FOUNDATION SCHEDULE

POLE TYPE	MT. HT.	MASTARM LENGTH	FOUNDATION TYPE	X	Y	HOOPS			VERTICAL RODS			CU. YDS. CONCRETE
						NO.	SIZE	LIN. FT.	NO.	SIZE	LIN. FT.	
PEDESTRIAN SIGNAL POLE	10'	-	A	2'-0"	5'-0"	4	#4	23'-0"	6	#4	28'-0"	.6
LIGHT POLE	25'-30'	ALL	A	2'-0"	5'-0"	4	#4	23'-0"	6	#4	28'-0"	.6
LIGHT POLE	35'	ALL	B	2'-6"	7'-0"	4	#4	29'-4"	6	#6	40'-0"	1.3
LIGHT POLE	40'-50'	ALL	C	3'-0"	8'-0"	5	#4	44'-2"	8	#6	61'-4"	2.1
SIGNAL POLE	-	20' - 45'	D	3'-0"	9'-0"	5	#4	44'-2"	8	#6	69'-4"	2.4
PED. PUSHBUTTON POLE	4'-0"	-	E	1'-6"	2'-6"	-	-	-	-	-	-	.2
DUAL MASTARM SIGNAL POLE	-	ALL	F	3'-0"	12'-0"	8	#5	70'-8"	12	#6	140'	3.1
SIGNAL POLE	-	50' - 55'	F	3'-0"	12'-0"	8	#5	70'-8"	12	#6	140'	3.1
SIGNAL POLE	-	60' - 65'	G	3'-6"	14'-0"	9	#5	78'-10"	12	#6	166'	3.7

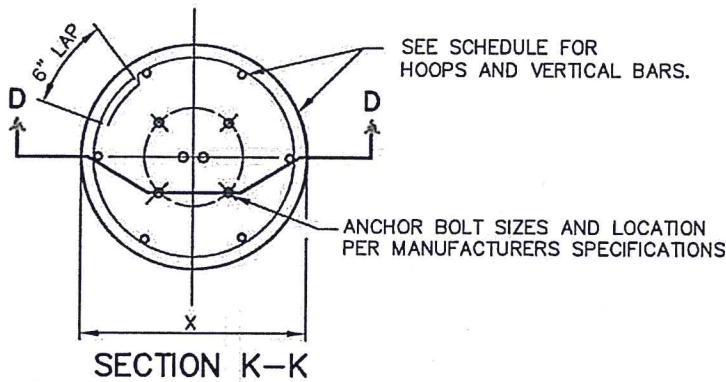

- NOTES:**
- (A) LOCATE FOUNDATIONS AS INDICATED ON THE PROJECT PLAN SHEETS.
 - (B) ALL CONDUIT ELBOWS USED IN CONCRETE BASES SHALL BE RPC.
 - (C) STEEL CONDUIT SHALL BE USED TO EXTEND ELBOWS BEYOND FOUNDATION.
 - (D) SPARE STUBOUTS SHALL BE TERMINATED WITH A STEEL COUPLING AND PLASTIC PUSH PLUG AT BOTH ENDS.
 - (E) DO NOT GROUT IF BREAKAWAY DEVICES ARE USED.

TYPICAL POLE FOUNDATION SECTION D-D

